


www.hct-battery.com
Call us: 0755-27515099



ADDRESS: 10 BLDG, FUHUA INDUSTRIAL AREA
BAOAN AVENUE, TANGWEI VILLAGE
FUYONG TOWN, BAOAN DISTRICT
SHENZHEN, 518003, CHINA

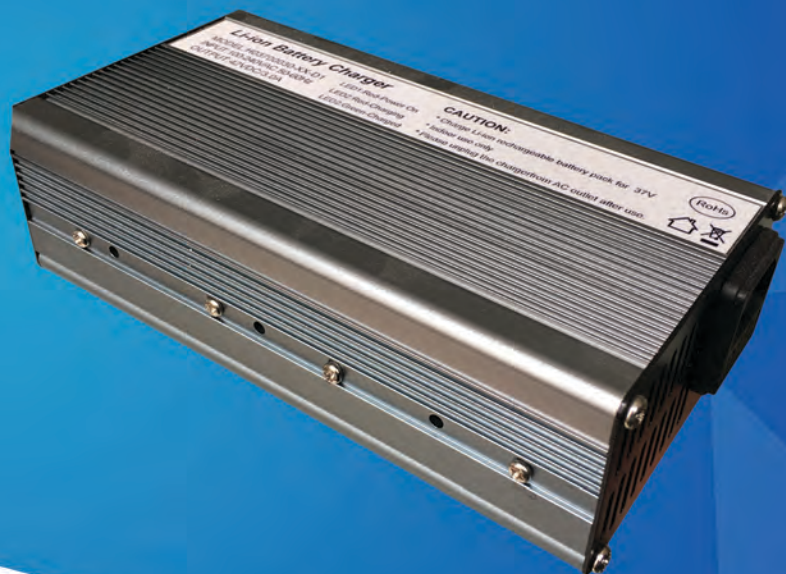

PRODUCT CATALOG

- BATTERY
- CHARGER
- CUSTOMIZATION

Email: info@hct-battery.com

✓ Over 18 Years Industry

Founded in 1999, HCT Electric Co., Ltd. is a Sino-American joint venture and an independent economic entity combining R&D, manufacturing and marketing of electronic products.

HCT specialized in many kinds of rechargeable batteries and chargers, including Nimh batteries, Lead Acid batteries, Li-ion batteries, Polymer batteries, and related battery chargers.

We believe that we can provide best service for you.

For More Details



65W li-on charger

CE/UL

18
YEARS
EXPERIENCE



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



HCT
ELECTRIC CO.,LTD

Certification

1 CE

2 UL

3 FCC

SPECIFICATION

Mode number:

H04811012-XX-D1, H01480040-XX-D1,
H01110040-XX-D1, H01850030-XX-D1,
H02590020-XX-D1, H03700015-XX-D1
H02220030-XX-D1, H02960020-XX-D1,
H03330019-XX-D1, H04030020-XX-D1,
H04440014-XX-D1

Input : AC100-240V

Output: 16.8V 4A; 11.1V 4A; 21V 3A;

42V 1.5A; 54.6V 1.2A; 22.2V 3A; 29.6
2A; 33.3V 1.9A; 40.3V 1.6A; 44.4V 1.4A

Lithium



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



SPECIFICATION

Case number: 004

Charger type: Lithium battery charger

Mode number: Output:

| | |
|-----------------|--------------------|
| H01480010-XX-D1 | 16.8V 1A |
| H00740020-XX-D1 | 8.4V 2A/1.5A/1A |
| H00370030-XX-D1 | 4.2V 3A |
| H00370020-XX-D1 | 4.2V 2A/1.5A |
| H01110010-XX-D1 | 12.6V 1.3A/1A/0.5A |

Input : AC100-240V

AC Input: US/UK/EU/AUS/AR/CHN

DC Output: Selectable

Dimension: 29*44*100 mm



SPECIFICATION

Case number: 043

Charger type: Lithium battery charger

Mode number: Output:

| | |
|-----------------|---------------|
| H01260030-XX-D1 | 12.6V 3A |
| H00740030-XX-D1 | 7.4V 3A |
| H03780010-XX-D1 | 37.8V 1A |
| H01890020-XX-D1 | 18.9V 2A/1.5A |
| H01110020-XX-D1 | 12.6V 2A/1.5A |
| H01260020-XX-D1 | 16.8V 2A/1.5A |
| H01850020-XX-D1 | 21V 2A/1.5A |
| H02220015-XX-D1 | 25.2V 1.5A |
| H02590012-XX-D1 | 29.4V 1.2A |

Input : AC100-240V

AC Input: US/UK/EU/AUS/AR/CHN

DC Output: Selectable

Dimension: 35*57*100 mm

Lithium



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



SPECIFICATION

Case number: 015

Charger type: Lithium battery charger

Mode number: Output:

| | |
|-----------------|---------------|
| H00370005-XX-W1 | 4.2V 0.5A |
| H00370010-XX-W1 | 4.2V 1A |
| H00370015-XX-W1 | 4.2V 1.5A |
| H00740010-XX-W1 | 8.4V 1A/0.5A |
| H01110010-XX-W1 | 12.6V 1A/0.5A |

Input : AC100-240V

AC Input: Selectable

DC Output: Selectable

Dimension:



SPECIFICATION

Case number: 047

Charger type: Lithium battery charger

Mode number: Output:

| | | |
|-----------------|------------|---------|
| H03700030-XX-D1 | 37/42V | 3A |
| H03330030-XX-D1 | 33.3/37.5V | 3A |
| H02960035-XX-D1 | 29.6/33.6V | 3.5A |
| H02590040-XX-D1 | 25.9/29.4V | 4A/3A |
| H02220045-XX-D1 | 22.2/25.2V | 4.5A/4A |
| H01850020-XX-D1 | 18.5/21V | 5A |

Input : AC100-240V

AC Input:US/UK/EU/AUS/AR/CHN

DC Output:Selectable

Dimension:42*83*155mm

Lithium



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



SPECIFICATION

Case number: HCT-L200

Charger type: Lithium battery charger

Mode number: Output:

| | |
|-----------------|---------------|
| H04200050-XX-D1 | 42V 5A |
| H03700030-XX-D1 | 42V 3A |
| H03780055-XX-D1 | 37.8V 5.5A/5A |
| H03360060-XX-D1 | 33.6V 6A/5.5A |
| H02940070-XX-D1 | 29.4V 7A/6.5A |
| H02520080-XX-D1 | 25.2V 8A/7.5A |

Input : AC100-240V

AC Input: US/UK/EU/AUS/AR/CHN

DC Output: Selectable

Dimension: 55*91*170 mm

SPECIFICATION



Case number: HCT-L500

Charger type: Lithium battery charger

Mode number: Output:

| | | |
|-----------------|-------|-----------|
| H02940300-XX-D1 | 29.4V | 30/25A |
| H03360250-XX-D1 | 33.6V | 25/20A |
| H03780200-XX-D1 | 37.8V | 20/15A |
| H04200200-XX-D1 | 42V | 20/15/10A |
| H04620150-XX-D1 | 46.2V | 15/10A |
| H05040150-XX-D1 | 50.4V | 15A |
| H05460150-XX-D1 | 54.6V | 15A |
| H05880100-XX-D1 | 58.8V | 10A |
| H06300100-XX-D1 | 63V | 10A |

Input : AC100-240V

AC Input: US/UK/EU/AUS/AR/CHN

DC Output: Selectable

Dimension: 91*157*280mm

Lithium



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060

SPECIFICATION

Case number: 043

Charger type: NI-MH battery charger

Mode number:

H01500510-XXX-1

H01500612-XXX-1

H01500714-XXX-1

H01500816-XXX-1

H01500918-XXX-1

H01501020-XXX-1

Output: 4.8V 6.0V 7.2V 8.4V 9.6V 10.8V
0.5A~2.0A

H02400510-XXX-1

H02400612-XXX-1

H02400714-XXX-1

H02400816-XXX-1

H02400918-XXX-1

Output: 9.6V 10.8V 12V 13.2V 14.4V 15.6V
16.8V 18V
0.5A~2.0A

H03400510-XXX-1 19.2/20.4V 0.5~1.4A

H03400612-XXX-1 21.6/22.8V 0.5~1.4A

H03400714-XXX-1 24V 0.5~1.4A

Output: 19.2V 20.4V 21.6V 22.8V 24V
0.5~1.4A

-----The Above had UL and CE-----

Input : AC100-240V

AC Input: US/UK/EU/AUS/AR/CHN

DC Output: Selectable

Dimension: 29*44*100 mm



-----The below had CE-----

Mode Number:

H00720408-XX-D1

H00720510-XX-D1

H00720612-XX-D1

H00720714-XX-D1

H01201020-XX-D1

H01200918-XX-D1

H01200020-XX-D1

Output: 2.4V 3.6V 4.8V 6.0V 7.2V
0.4~1.4A

H01201020-XX-D1

H01200918-XX-D1

H01200020-XX-D1

Output: 10.8V 12V 9.6V 8.4V 6.0V 7.2V
0.9~2A

NI-MH



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060

SPECIFICATION

Case number: 015

Charger type: Lead Acid Charger

Mode number: Output:

H00240004-XX-W1 24V 0.4A

H00600130-XX-W1 6V 0.5A;6V0.7A;6V1A

Input : AC100-240V

AC Input: US/UK/EU/AUS/AR/CHN

DC Output: Selectable

Dimension:mm

SPECIFICATION

Case number: 043

Charger type: Lead Acid charger

Mode number: Output:

H00600030-XX-D1 6V 3 A

H01200015-XX-D1 12V 1.5A

H02400008-XX-D1 24V 0.8A

H01200030-XX-D1 12V 3A

H02400015-XX-D1 24V 1.5A

H01200030-XX-D2 6-12V 3A

Input : AC100-240V

AC Input:US/UK/EU/AUS/AR/CHN

DC Output:Selectable

Dimension:mm

Lead Acid



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



SPECIFICATION

Case number: 015

Charger type: Lead Acid Charger

Mode number: Output:

H02400030-XX-D1 24V 3A

H03600020-XX-D1 36V 2A

H04800015-XX-D1 48V 1.5A

Input : AC100-240V

AC Input: US/UK/EU/AUS/AR/CHN

DC Output: Selectable

Dimension:mm



SPECIFICATION

Case number: 043

Charger type: Lead Acid charger

Mode number: Output:

H02400060-XX-D1 24V 6 A

H03600040-XX-D1 36V 4 A

H04800035-XX-D1 48V 3.5A

Input : AC100-240V

AC Input:US/UK/EU/AUS/AR/CHN

DC Output:Selectable

Dimension:mm

Lead Acid



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



SPECIFICATION

Model NO: Replacement for Nurit 8400
Capacity: 1800mah
Voltage: 7.4V
Weight: 96.5g
Warranty: 1 year

SPECIFICATION

Model NO: Replacement for Nurit 8010
Capacity: 1800mah
Voltage: 7.4V
Weight: 96.5g
Warranty: 1 year

SPECIFICATION

Model NO: Replacement for Nurit 8020
Capacity: 1800mah
Voltage: 7.4V
Weight: 96.5g
Warranty: 1 year

POS



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



SPECIFICATION

Model NO: Replacement for Ingenico
IWL220 or IWL250/ Verifone VX670
Capacity: 2600mah
Voltage: 3.7V
Dimension: 20mm*20mm*70mm
Weight: 60g
Warranty: 1 year



SPECIFICATION

Model NO: Rematlo A0285A
Capacity: 1100mah
Voltage: 7.4V
Dimension: 53*36*14mm
Weight: 50g
Warranty: 1 year



SPECIFICATION

Model NO: Replacement for Verifone VX670
Capacity: 1800mah
Voltage: 7.4V
Weight: 96.5g
Warranty: 1 year

POS



HCT
ELECTRIC CO.,LTD



Email: info@hct-battery.com
WEB: www.hct-battery.com



Tel: (86)755-27515099
Fax: (86)755-27515060



SPECIFICATION

This power bank we can do 13000mah with 5*18650 with BIS/UL certification.

Out put: 5/2A and 5/1A .(Two usb port)

The PCB had Charging control, charging protection, discharge protection, overload protection, short circuit protection.

Size:138*63*23

Color: white, Grey, Black. (For other kind color required 3k quantity).



SPECIFICATION

This powerbank we can do 20000mah (Real capacity means the capacity will not less than 20000mah)

Used 8 cell 18650 with BIS/UL certification. It had 3 usb port, all is 5V 2A out put.

The PCB had Overcharge protection, Overdischarge protection.

Provide logo print service.

Powerbank